

## 710 watt gutter support groove cutter

**F 1109**

**Order number 251.338**



### 710 watt gutter support groove cutter

- + Rugged motor
- + 4 HSS reversible cutters: the cutters can be reversed, allowing them to be used four times
- + Cutting head: 80 mm diameter, M 14 tool fixture
- + Controlled chip channelling
- + Adjustable to 6 mm and 8 mm thick gutter supports

#### Technical attributes

Power input	710 watt
Power output	420 watt
No load speed	10000 rpm
Planer width	40 mm
Planer depth	6 / 8 mm
No. of cutters	4 pieces
Tool fixture	M 14
Cable length	4,0 m
Weight	3,9 kg

#### Standard equipment

1 set HSS reversible cutters (4 pieces)	241.091
1 torx wrench	258.861
1 open-ended wrench SW 30/17	106.461
1 carrying case L-BOXX® 238	414.093
1 case insert	434.248

## Accessories

### HM reversible blades

Order number 229.555




#### Technical attributes

Dimensions in mm	21 x 21
QTY/PKG	4

### HSS reversible blades

Order number 241.091

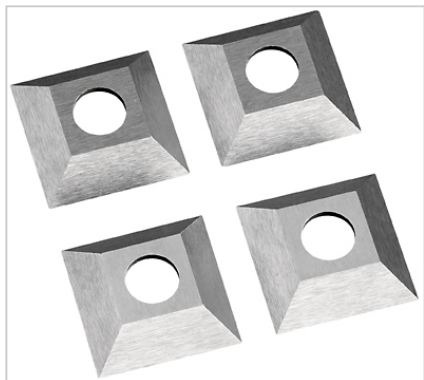

#### Technical attributes

Dimensions in mm	21 x 21
QTY/PKG	4

### Carrying case L-BOXX®

Order number 414.093



#### Technical attributes

External dimensions L x W x H	442 x 357 x 253 mm
Internal dimensions L x W x H	378 x 306 x 209 mm
Weight	2,8 kg
QTY/PKG	1

The robust storage and transport system L-BOXX® made of impact-resistant plastic conveys tools, accessories and consumables easily and

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

**FLEX**  
Das Original

comfortably to the place of use. Elaborate inserts provide order and clarity, ergonomically shaped handles and additional moulded recesses for flexible and comfortable handling. The unbeatably simple connection and disconnection of the different L-BOXXes optimises combined transportation. Fits the TÜV-tested in-vehicle equipment system from Sortimo perfectly and without adapters. Load capacity per L-BOXX® up to 25 kg, combined transportation up to 40 kg, the cover can be loaded up to 100 kg. Splash-proof. Without insert.